



# PUBLIC NOTICE

US Army Corps  
of Engineers  
New York District  
Jacob K. Javits Federal Building  
New York, N.Y. 10278-0090  
ATTN: Regulatory Branch

In replying refer to:  
Public Notice Number: **NAN-2022-00351-EMI**  
Issue Date: **June 3, 2022**  
Expiration Date: **July 2, 2022**

---

To Whom It May Concern:

The New York District, Corps of Engineers has received an application for a Department of the Army permit pursuant to Section 10 of the Rivers and Harbors Act of 1899 (33 U.S.C. 403) and Section 404 of the Clean Water Act (33 U.S.C. 1344).

APPLICANT: Suffolk County Department of Public Works  
335 Yaphank Avenue  
Yaphank, New York 11980

ACTIVITY: Ten-Year Maintenance Dredging with Beach Placement

WATERWAY: Menantic Creek

LOCATION: Dredge Location: Menantic Creek, Town of Shelter Island, Suffolk County, New York

Dredge Material Placement Location: Shell Beach and Wades Beach, Town of Shelter Island, Suffolk County, New York

A detailed description and plans of the applicant's activity are enclosed to assist in your review.

The decision whether to issue a permit will be based on an evaluation of the probable impact including cumulative impacts of the proposed activity on the public interest. That decision will reflect the national concern for both protection and utilization of important resources. The benefit which reasonably may be expected to accrue from the proposal must be balanced against its reasonably foreseeable detriments. All factors which may be relevant to the proposal will be considered including the cumulative effects thereof; among those are conservation, economics, aesthetics, general environmental concerns, wetlands, historic properties, fish and wildlife values, flood hazards, floodplain values, land use, navigation, shoreline erosion and accretion, recreation, water supply and conservation, water quality, energy needs, safety, food and fiber production, mineral needs, considerations of property ownership and, in general, the needs and welfare of the people.

The Corps of Engineers is soliciting comments from the public; Federal, state, and local agencies and officials; Indian Tribes; and other interested parties in order to consider and evaluate the impacts of this proposed activity. Any comments received will be considered by the Corps of Engineers to determine whether to issue, modify, condition or deny a permit for this proposal. To make this decision, comments are used to assess impacts on endangered species, historic properties, water quality, general environmental effects, and the other public interest factors listed above. Comments are used in preparation of an Environmental Assessment and/or an Environmental Impact Statement pursuant to the National Environmental Policy Act. Comments are also used to determine the need for a public hearing and to determine the overall public interest

**CENAN-OP-RE**  
**PUBLIC NOTICE NO. NAN-2022-00351-EMI**

of the proposed activity.

ALL COMMENTS REGARDING THE PERMIT APPLICATION MUST BE PREPARED IN WRITING AND EMAILED TO REACH THIS OFFICE BEFORE THE EXPIRATION DATE OF THIS NOTICE, otherwise, it will be presumed that there are no objections to the activity.

Comments submitted in response to this notice will be fully considered during the public interest review for this permit application. Comments provided will become part of the public record for this permit application. All written comments, including contact information, will be made a part of the administrative record, available to the public under the Freedom of Information Act. The Administrative Record, or portions thereof, may also be posted on a Corps of Engineers internet web site. Due to resource limitations, this office will normally not acknowledge the receipt of comments or respond to individual letters of comment.

Any person may request, in writing, before this public notice expires, that a public hearing be held to collect information necessary to consider this application. Requests for public hearings shall state, with particularity, the reasons why a public hearing should be held. It should be noted that information submitted by email is considered just as carefully in the permit decision process and bears the same weight as that furnished at a public hearing.

Our preliminary determination is that the activity for which authorization is sought herein is not likely to affect any Federally endangered or threatened species or their critical habitat. However, pursuant to Section 7 of the Endangered Species Act (16 U.S.C. 1531), the District Engineer is consulting with the appropriate Federal agency to determine the presence of and potential impacts to listed species in the project area or their critical habitat.

The Magnuson-Stevens Fishery Conservation and Management Act, as amended by the Sustainable Fisheries Act (Public Law 104-267), requires all Federal agencies to consult with the National Oceanic and Atmospheric Administration Fisheries Service (NOAA/FS) on all actions, or proposed actions, permitted, funded, or undertaken by the agency, that may adversely affect Essential Fish Habitat (EFH). The proposed work, fully described in the attached work description, could cause the disruption of habitat for various lifestages of some EFH-designated species as a result of a temporary increase in turbidity during construction. However, the New York District has made the preliminary determination that the site-specific adverse effects are not likely to be substantial because it is expected that fish populations would avoid the small area of disturbance. Further consultation with NOAA/FS regarding EFH impacts and conservation recommendations is being conducted and will be concluded prior to the final decision.

Based upon a review of the latest published version of the National Register of Historic Places, there are no known sites eligible for, or included in, the Register within the permit area. Presently unknown archeological, scientific, prehistorical, or historical data may be lost by work accomplished under the required permit.

Reviews of activities pursuant to Section 404 of the Clean Water Act will include application of the guidelines promulgated by the Administrator, U.S. Environmental Protection Agency, under authority of Section 404 (b) of the Clean Water Act and the applicant will obtain a water quality certificate or waiver from the appropriate state agency in accordance with Section 401 of the Clean Water Act prior to a permit decision.

**CENAN-OP-RE**  
**PUBLIC NOTICE NO. NAN-2022-00351-EMI**

Pursuant to Section 307 (c) of the Coastal Zone Management Act of 1972 as amended [16 U.S.C. 1456 (c)], for activities under consideration that are located within the coastal zone of a state which has a federally approved coastal zone management program, the applicant has certified in the permit application that the activity complies with, and will be conducted in a manner that is consistent with, the approved state coastal zone management program. By this public notice, we are requesting the state's concurrence with, objection to, or waiver of the applicant's certification. No permit decision will be made until one of these actions occur. For activities within the coastal zone of New York State, the applicant's certification and accompanying information is available from the Consistency Coordinator, New York State Department of State, Division of Coastal Resources and Waterfront Revitalization, Coastal Zone Management Program, One Commerce Plaza, 99 Washington Avenue, Albany, New York 12231, Telephone (518) 474-6000. Comments regarding the applicant's certification, and copies of any letters to this office commenting upon this proposal, should be so addressed.


In addition to any required water quality certificate and coastal zone management program concurrence, the applicant has obtained or requested the following governmental authorization for the activity under consideration:

- New York State Department of Environmental Conservation

It is requested that you communicate the foregoing information concerning the activity to any persons known by you to be interested and who did not receive a copy of this notice. Please send all comments and questions concerning this application to [Christopher.W.Minck@usace.army.mil](mailto:Christopher.W.Minck@usace.army.mil).

In order for us to better serve you, please complete our Customer Service Survey located at <http://www.nan.usace.army.mil/Missions/Regulatory/CustomerSurvey.aspx>.

For more information on New York District Corps of Engineers programs, visit our website at <http://www.nan.usace.army.mil>.

 Date: 2022.05.27  
11:42:34 -04'00'

**FOR AND IN BEHALF OF**  
Stephan A. Ryba  
Chief, Regulatory Branch

Enclosures

## **WORK DESCRIPTION**

The permit applicant, Suffolk County Department of Public Works (SCDPW), has requested Department of the Army (DA) authorization to conduct dredging, with ten-years maintenance with placement of all resultant dredged material at two designated beach placement areas. The project is located at Menantic Creek, in the Town of Shelter Island, Suffolk County, New York.

The proposed work would involve the following:

Maintenance dredge with ten-years maintenance, by hydraulic dredge, approximately 25,500 cubic yards (CY) of material from an approximately 258,225 square foot area (5.93 acres) channel area consisting of an approximately 75-foot-wide by 820-foot-long inner channel section leading to an approximately 100-foot-wide by 2,175-foot-long outer channel section. The inner channel section would be dredged to a depth of six feet below the plane of Mean Low Water (MLW) and the outer channel section would be dredged to a depth of eight feet below the plane of MLW. The approximate slope of the channel would be 1 to 3. The dredged material would be placed at two designated beach placement areas along the Shell Beach shoreline south of the channel and the Wades Beach shorelines to the east of the channel via a floating dredge pipeline.

The approximately 25,200 cubic yards would be placed at Shell Beach and/or Wades Beach after each dredge event. The maximum amount of material placed at each location is described below:


- Shell Beach – A maximum of approximately 25,500 CY of dredged material would be placed along the shoreline of which approximately 7,300 CY would be placed below the plane of Spring High Water (SHW) over approximately 145,500 square feet.
- Wades Beach – A maximum of approximately 12,000 CY of dredged material would be placed along the shoreline of which approximately 4,200 CY would be placed below the plane of SHW over approximately 64,000 square feet.

The applicant plans to conduct three (3) additional dredging events within the ten-year maintenance dredging period removing a maximum of approximately 25,500 CY from within the same dredging area with beach placement at the above referenced areas.

The applicant has stated that they have avoided, minimized, and mitigated for potential impacts proposed to the maximum extent practicable by limiting the dredged area to the minimum area required for safe and reasonable navigation of Menantic Creek. Any potential impacts would be temporary and would be offset by implementing best management practices associated with the proposed use of a hydraulic dredge and floating pipeline. The use of a hydraulic dredge and floating pipeline would provide the cleanest and least obtrusive method for sediment removal and transport, minimizing to the greatest extent possible any potential adverse effects to the aquatic environment.

The stated purpose of this project is to maintain safe navigable depths for vessel use in the waterway.



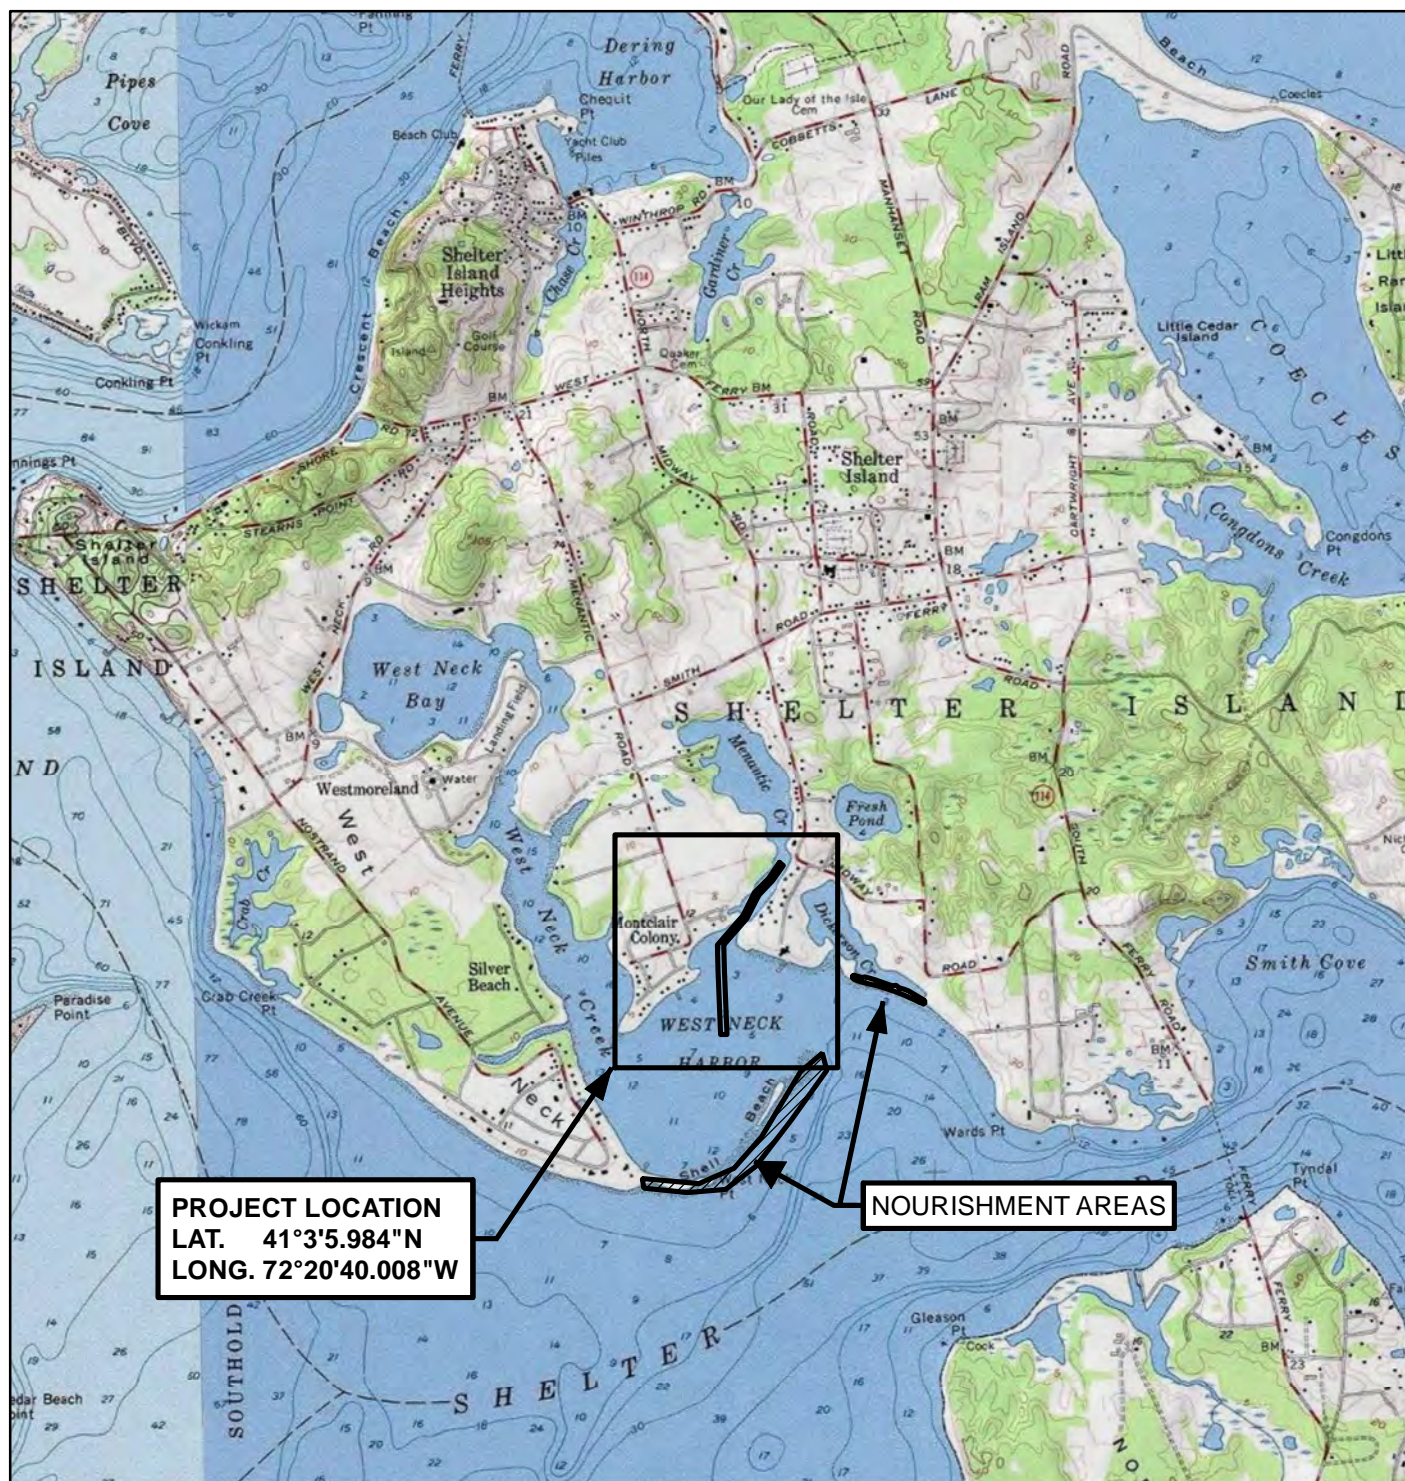

SOURCE: SOUTHDOLD AND GREENPORT USGS QUADRANGLES

0 1,500 3,000 6,000 Feet



GEI CONSULTANTS, INC., P. C.  
 HUNTINGTON STATION, NEW YORK

APPLICATION BY COUNTY OF SUFFOLK  
 JOSEPH T. BROWN, P.E.  
 COMMISSIONER  
 DEPARTMENT OF PUBLIC WORKS


**MAINTENANCE DREDGING AT:**  
**MENANTIC CREEK**

TOWN OF SHELTER ISLAND  
 SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 1 OF 8



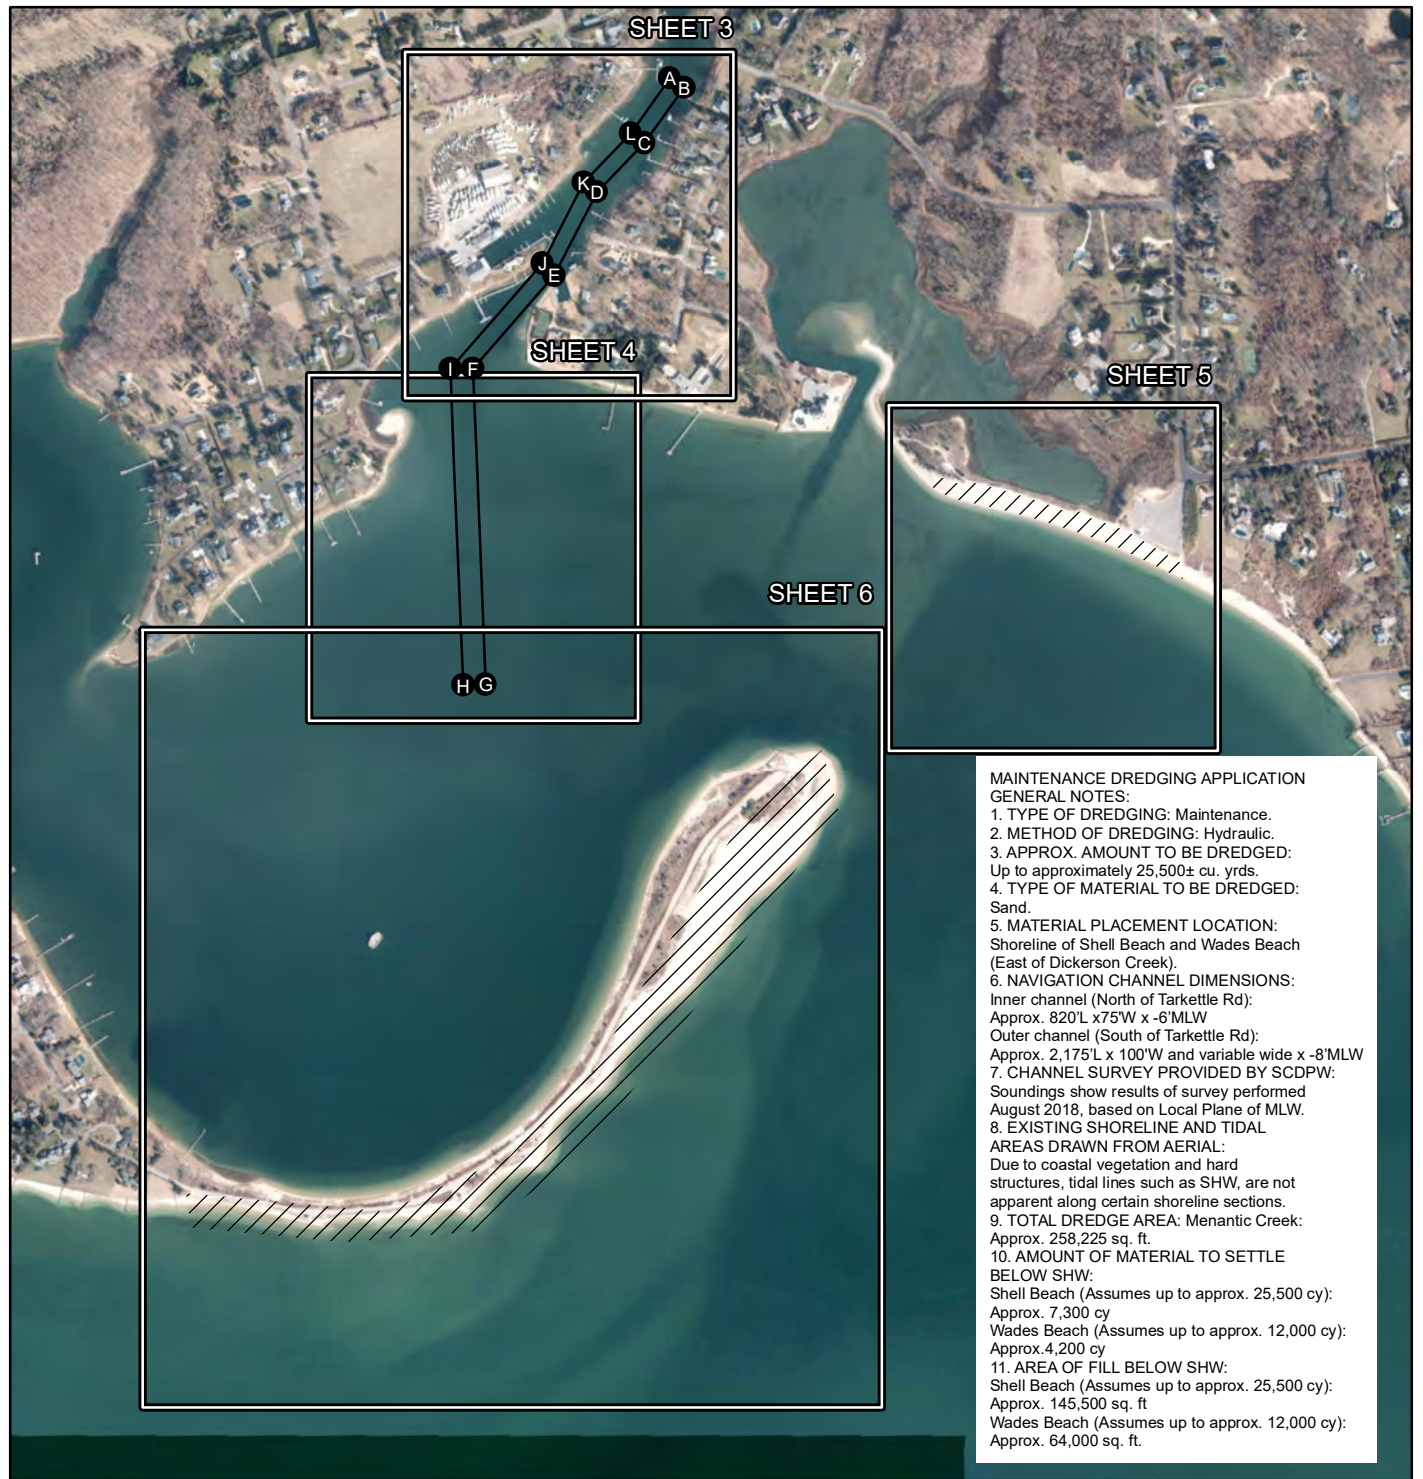

**MAINTENANCE DREDGING APPLICATION**  
**GENERAL NOTES:**  
 1. TYPE OF DREDGING: Maintenance.  
 2. METHOD OF DREDGING: Hydraulic.  
 3. APPROX. AMOUNT TO BE DREDGED:  
 Up to approximately 25,500± cu. yds.  
 4. TYPE OF MATERIAL TO BE DREDGED:  
 Sand.  
 5. MATERIAL PLACEMENT LOCATION:  
 Shoreline of Shell Beach and Wades Beach  
 (East of Dickerson Creek).  
 6. NAVIGATION CHANNEL DIMENSIONS:  
 Inner channel (North of Tarkettle Rd):  
 Approx. 820'L x 75'W x -6' MLW  
 Outer channel (South of Tarkettle Rd):  
 Approx. 2,175'L x 100'W and variable wide x -8' MLW  
 7. CHANNEL SURVEY PROVIDED BY SCDPW:  
 Soundings show results of survey performed  
 August 2018, based on Local Plane of MLW.  
 8. EXISTING SHORELINE AND TIDAL  
 AREAS DRAWN FROM AERIAL:  
 Due to coastal vegetation and hard  
 structures, tidal lines such as SHW, are not  
 apparent along certain shoreline sections.  
 9. TOTAL DREDGE AREA: Menantic Creek:  
 Approx. 258,225 sq. ft.  
 10. AMOUNT OF MATERIAL TO SETTLE  
 BELOW SHW:  
 Shell Beach (Assumes up to approx. 25,500 cy):  
 Approx. 7,300 cy  
 Wades Beach (Assumes up to approx. 12,000 cy):  
 Approx. 4,200 cy  
 11. AREA OF FILL BELOW SHW:  
 Shell Beach (Assumes up to approx. 25,500 cy):  
 Approx. 145,500 sq. ft.  
 Wades Beach (Assumes up to approx. 12,000 cy):  
 Approx. 64,000 sq. ft.

SOURCE: ESRI AERIAL IMAGERY, 2021

0 425 850 1,700 Feet



GEI CONSULTANTS, INC., P. C.  
 HUNTINGTON STATION, NEW YORK


APPLICATION BY COUNTY OF SUFFOLK  
 JOSEPH T. BROWN, P.E.  
 COMMISSIONER  
 DEPARTMENT OF PUBLIC WORKS

## MAINTENANCE DREDGING AT: MENANTIC CREEK

TOWN OF SHELTER ISLAND  
 SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 2 OF 8

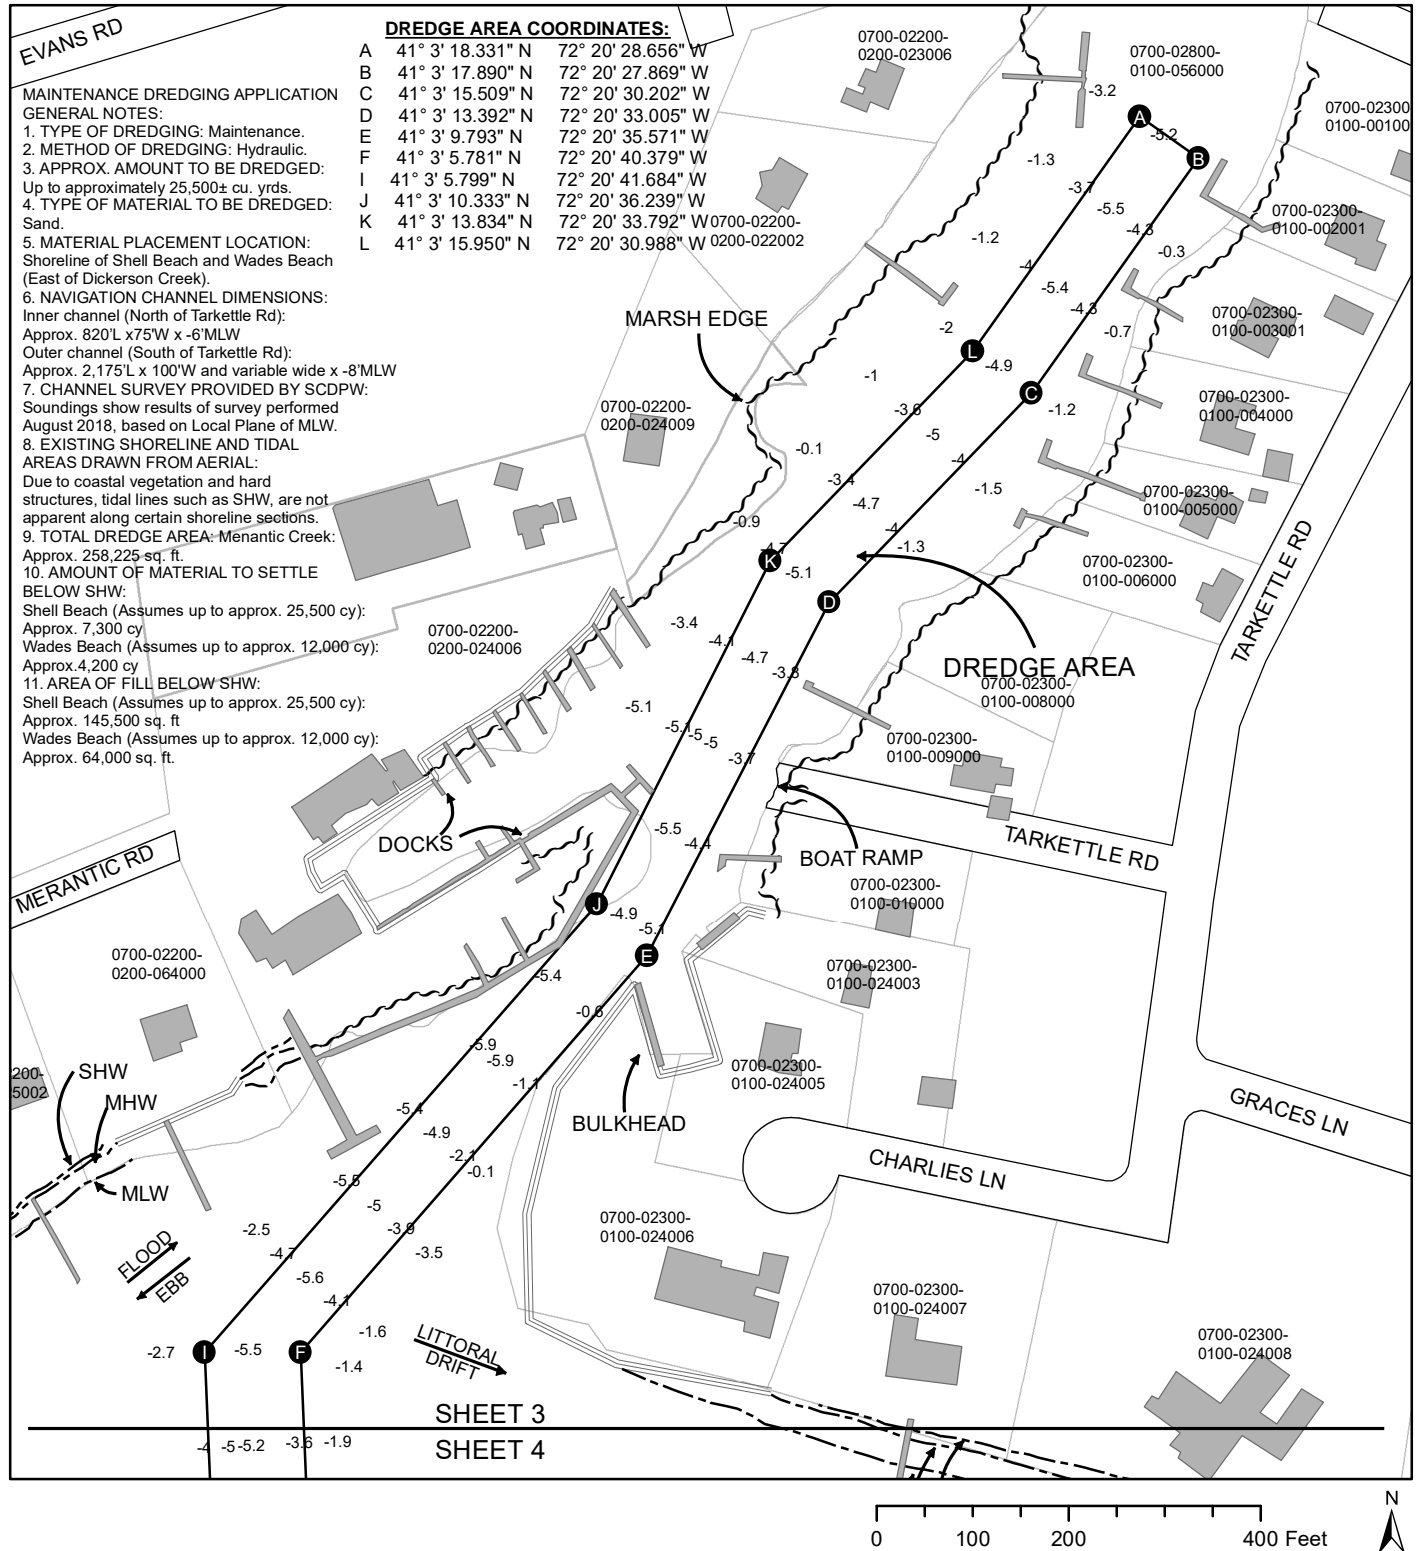

GEI CONSULTANTS, INC., P. C.  
HUNTINGTON STATION, NEW YORK



APPLICATION BY COUNTY OF SUFFOLK  
JOSEPH T. BROWN, P.E.  
COMMISSIONER  
DEPARTMENT OF PUBLIC WORKS

## MAINTENANCE DREDGING AT: MENANTIC CREEK

TOWN OF SHELTER ISLAND  
SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 3 OF 8

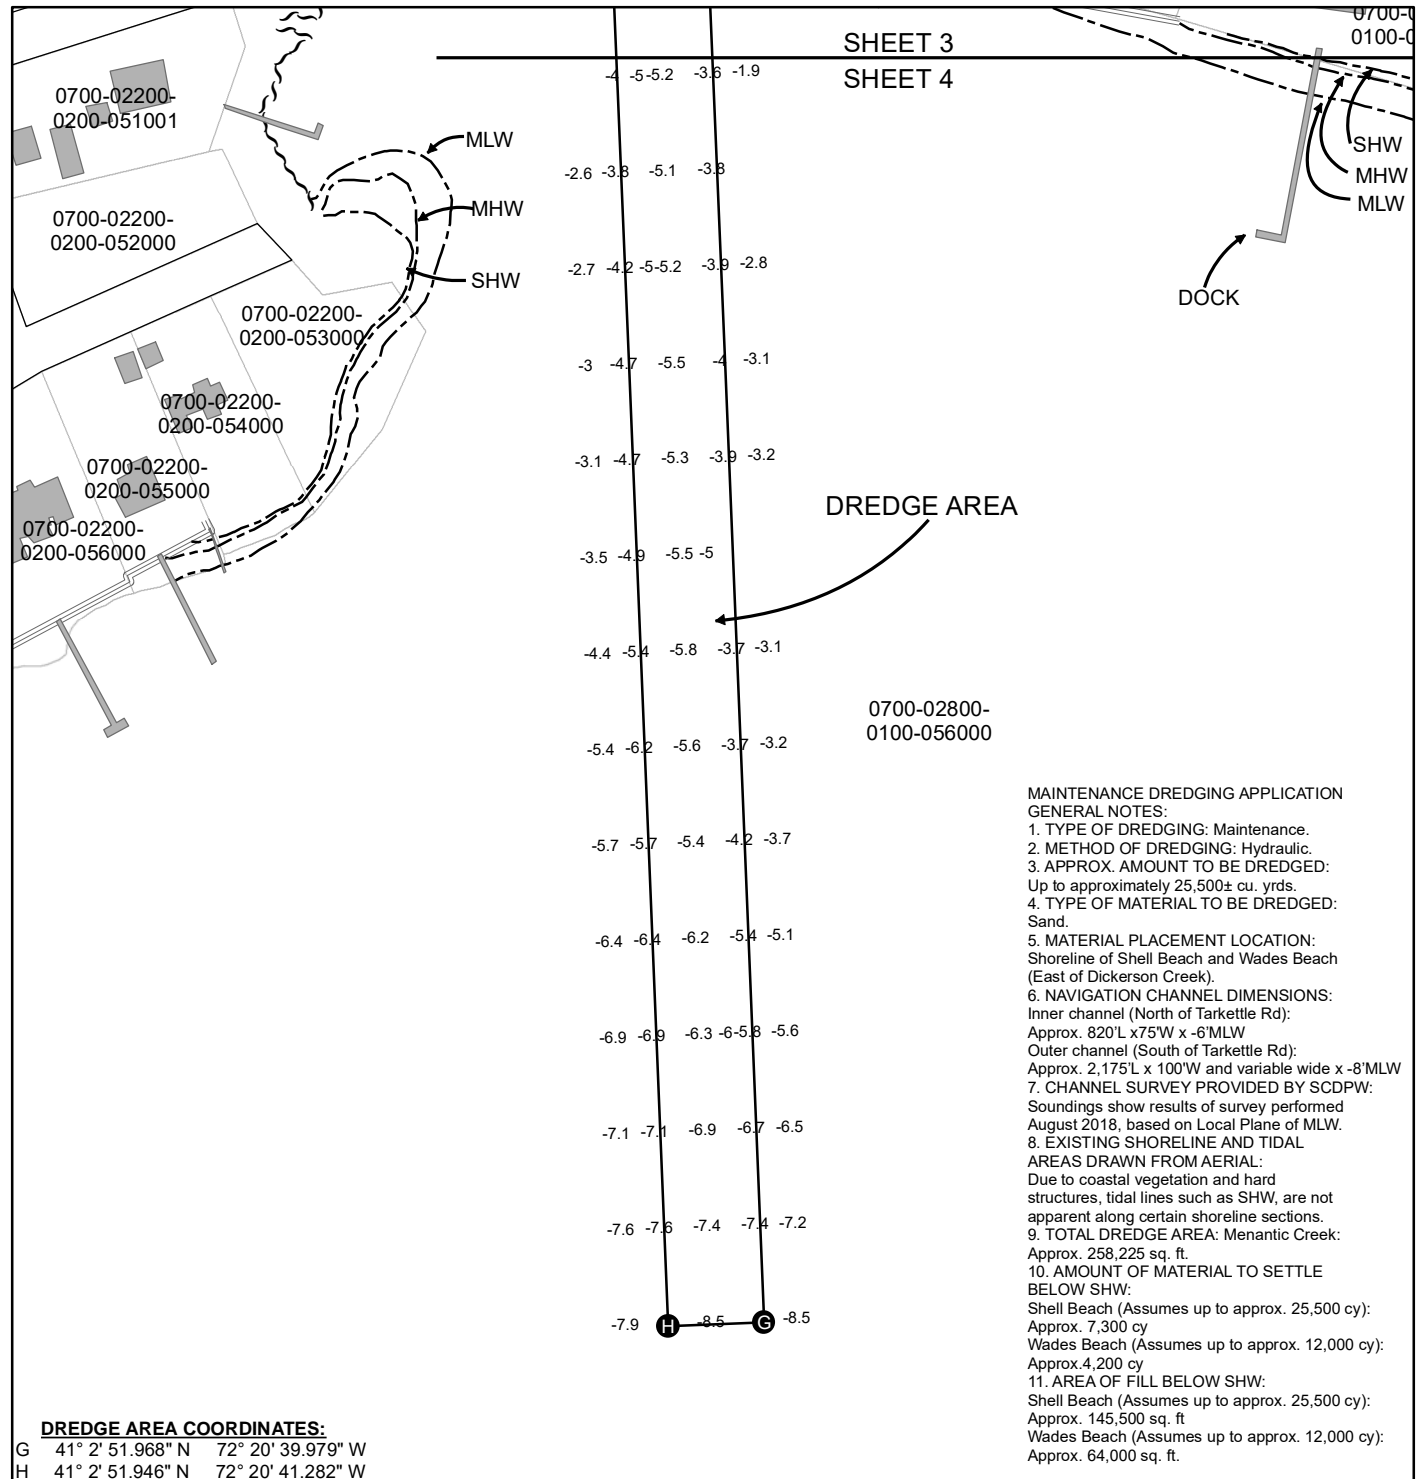

GEI CONSULTANTS, INC., P. C.  
HUNTINGTON STATION, NEW YORK

APPLICATION BY COUNTY OF SUFFOLK  
JOSEPH T. BROWN, P.E.  
COMMISSIONER  
DEPARTMENT OF PUBLIC WORKS

**MAINTENANCE DREDGING AT:**


**MENANTIC CREEK**

TOWN OF SHELTER ISLAND  
SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 4 OF 8



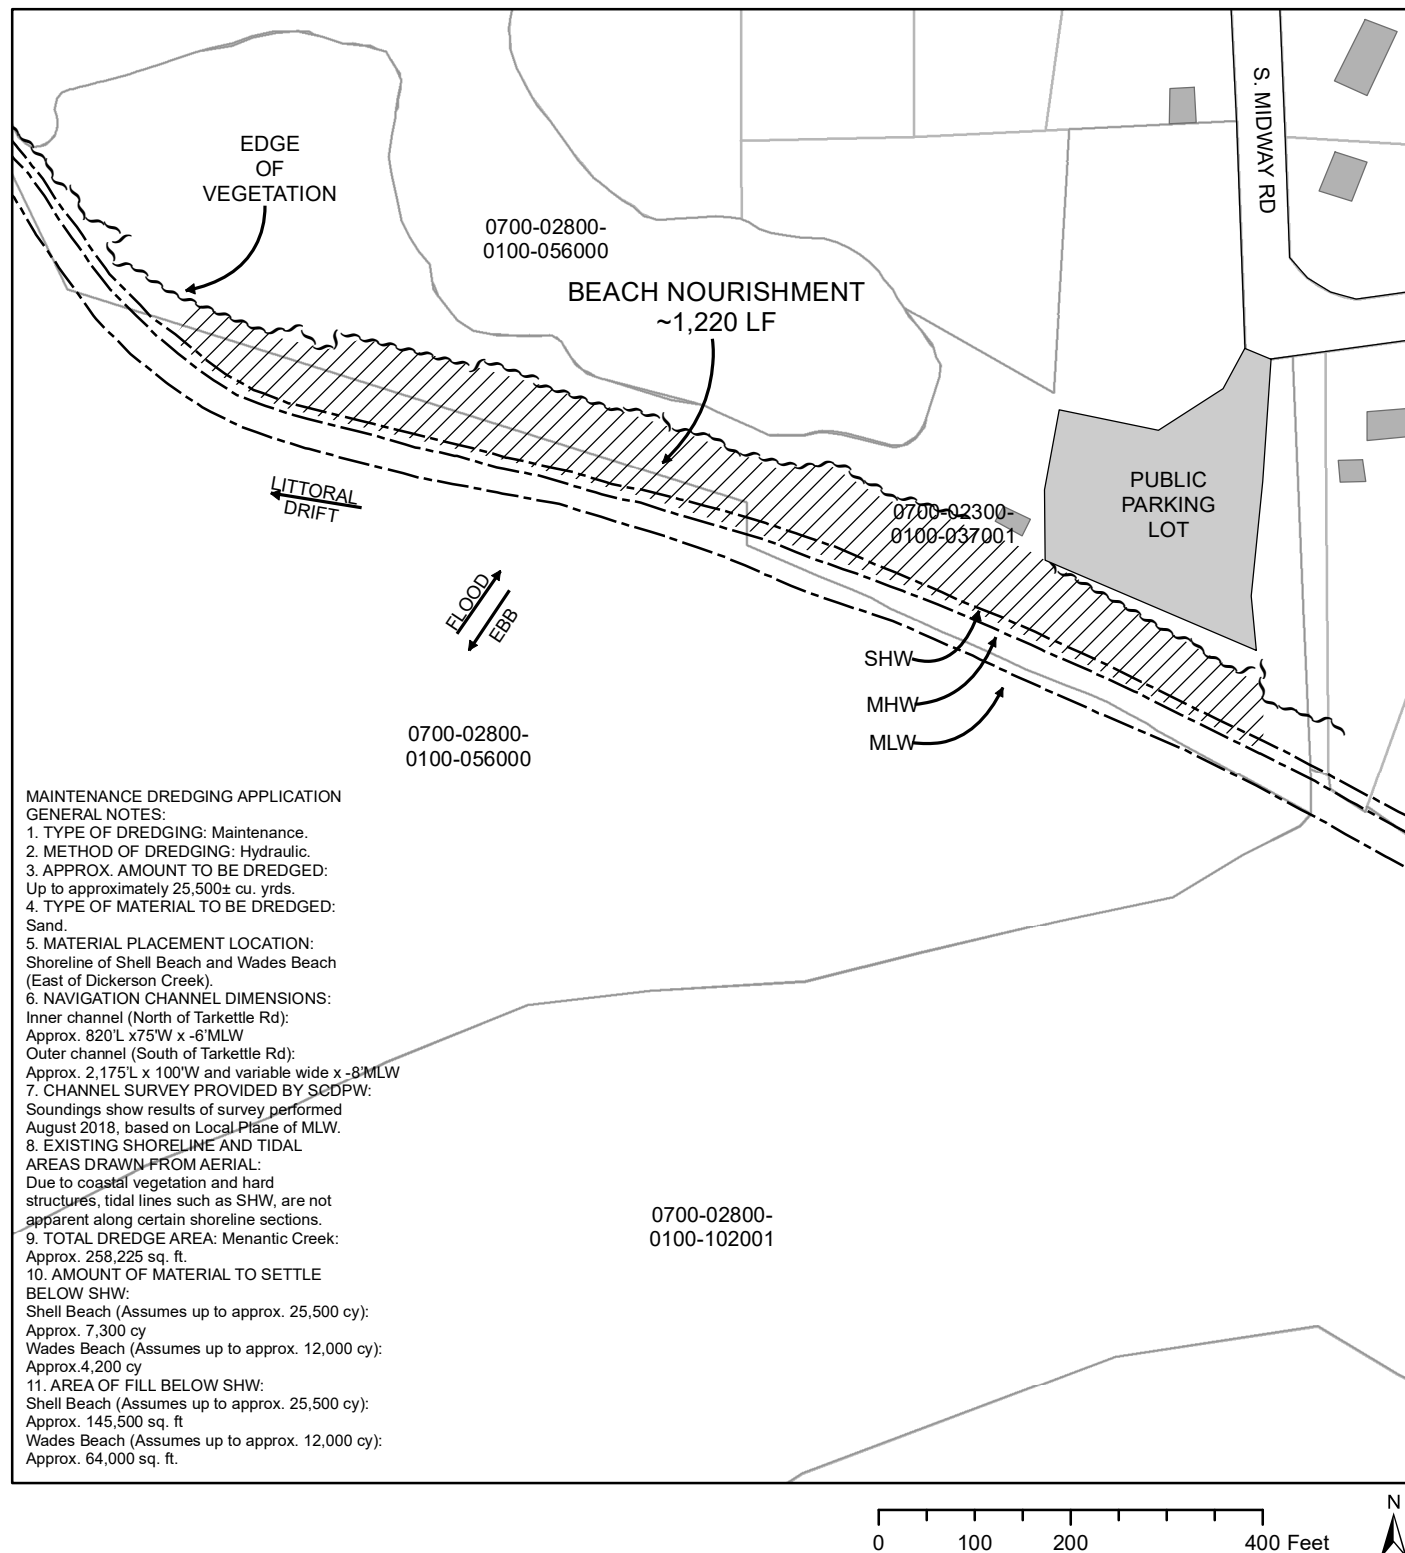

**MAINTENANCE DREDGING APPLICATION  
GENERAL NOTES:**

1. TYPE OF DREDGING: Maintenance.
2. METHOD OF DREDGING: Hydraulic.
3. APPROX. AMOUNT TO BE DREDGED:  
Up to approximately 25,500± cu. yds.
4. TYPE OF MATERIAL TO BE DREDGED:  
Sand.
5. MATERIAL PLACEMENT LOCATION:  
Shoreline of Shell Beach and Wades Beach  
(East of Dickerson Creek).
6. NAVIGATION CHANNEL DIMENSIONS:  
Inner channel (North of Tarkettle Rd):  
Approx. 820'L x 75'W x -6'MLW  
Outer channel (South of Tarkettle Rd):  
Approx. 2,175'L x 100'W and variable wide x -8'MLW
7. CHANNEL SURVEY PROVIDED BY SCDPW:  
Soundings show results of survey performed  
August 2018, based on Local Plane of MLW.
8. EXISTING SHORELINE AND TIDAL  
AREAS DRAWN FROM AERIAL:  
Due to coastal vegetation and hard  
structures, tidal lines such as SHW, are not  
apparent along certain shoreline sections.
9. TOTAL DREDGE AREA: Menantic Creek:  
Approx. 258,225 sq. ft.
10. AMOUNT OF MATERIAL TO SETTLE  
BELOW SHW:  
Shell Beach (Assumes up to approx. 25,500 cy):  
Approx. 7,300 cy  
Wades Beach (Assumes up to approx. 12,000 cy):  
Approx. 4,200 cy
11. AREA OF FILL BELOW SHW:  
Shell Beach (Assumes up to approx. 25,500 cy):  
Approx. 145,500 sq. ft.  
Wades Beach (Assumes up to approx. 12,000 cy):  
Approx. 64,000 sq. ft.



GEI CONSULTANTS, INC., P. C.  
HUNTINGTON STATION, NEW YORK


APPLICATION BY COUNTY OF SUFFOLK  
JOSEPH T. BROWN, P.E.  
COMMISSIONER  
DEPARTMENT OF PUBLIC WORKS

**MAINTENANCE DREDGING AT:  
MENANTIC CREEK**

TOWN OF SHELTER ISLAND  
SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 5 OF 8

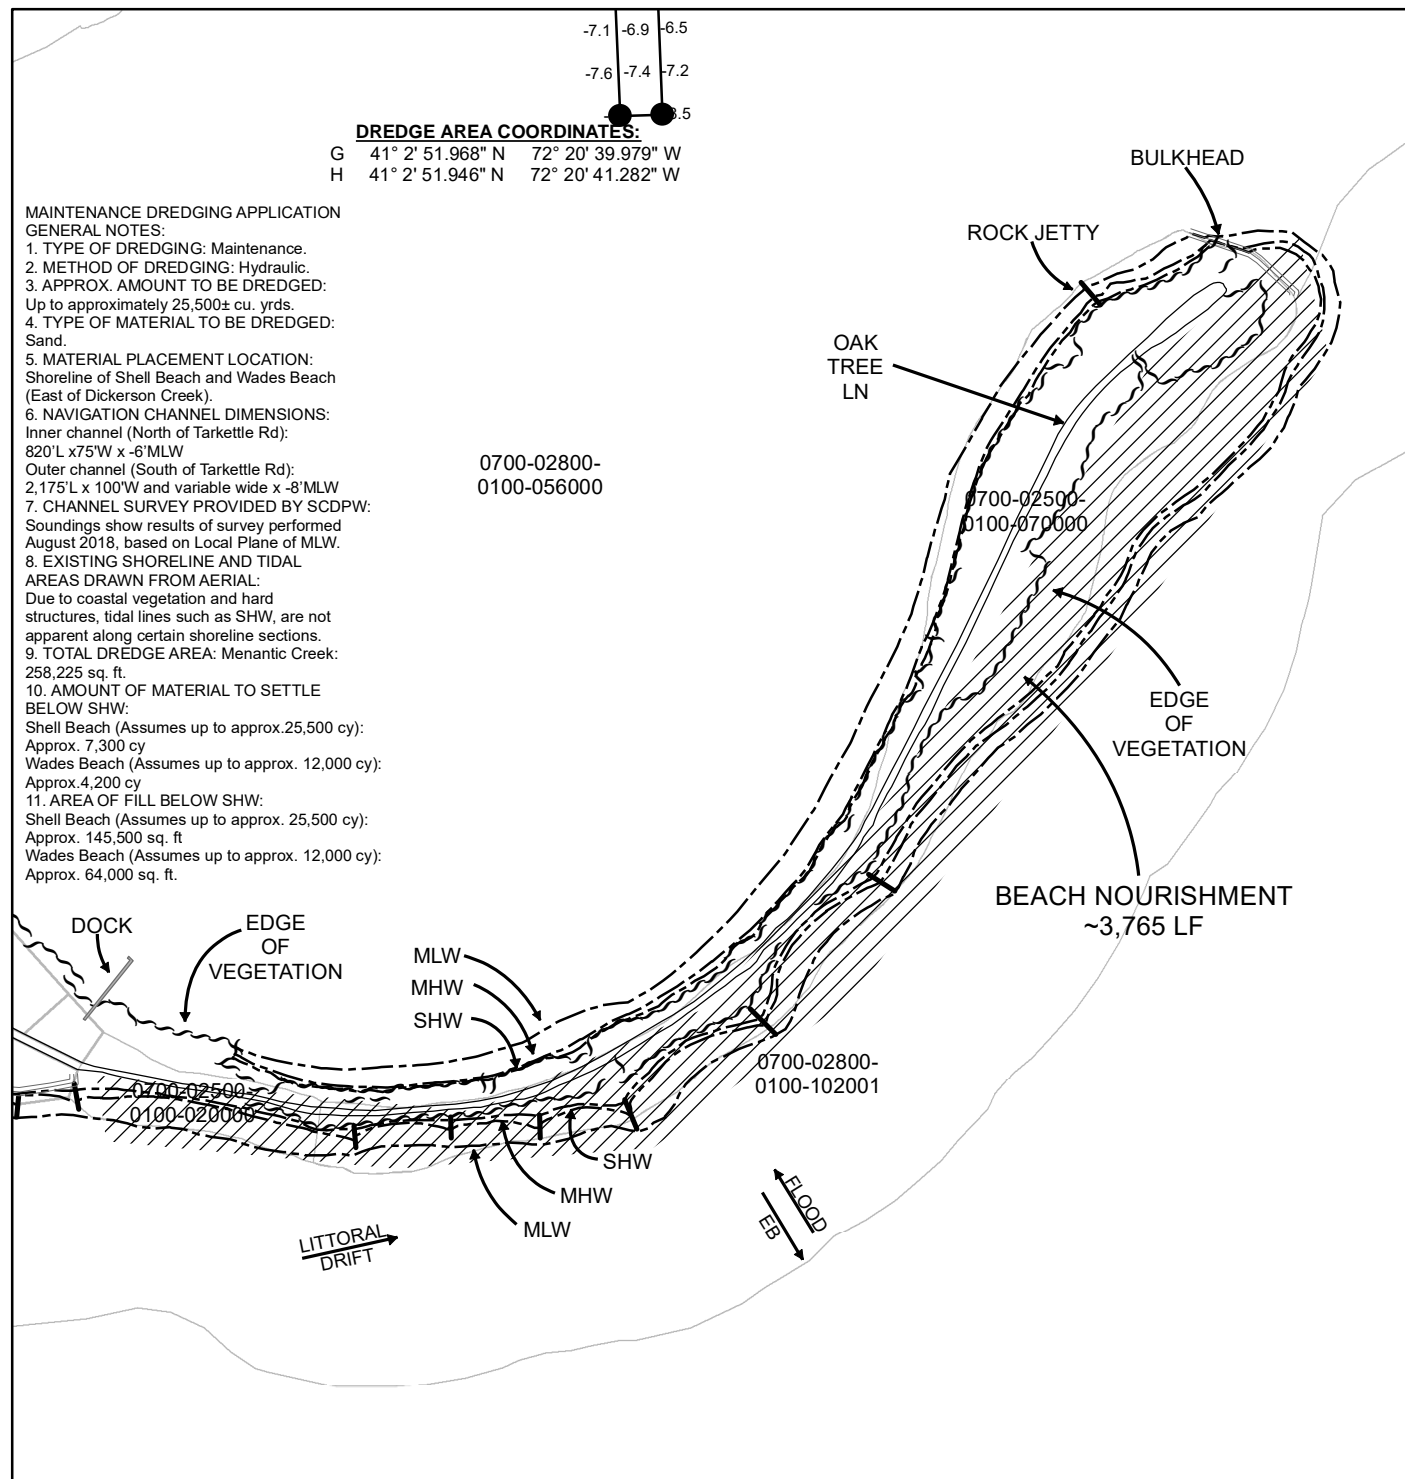

0 225 450 900 Feet



GEI CONSULTANTS, INC., P. C.  
 HUNTINGTON STATION, NEW YORK


APPLICATION BY COUNTY OF SUFFOLK  
 JOSEPH T. BROWN, P.E.  
 COMMISSIONER  
 DEPARTMENT OF PUBLIC WORKS

**MAINTENANCE DREDGING AT:**  
**MENANTIC CREEK**

TOWN OF SHELTER ISLAND  
 SUFFOLK COUNTY, NEW YORK


DATE: MARCH 2022

SHEET 6 OF 8

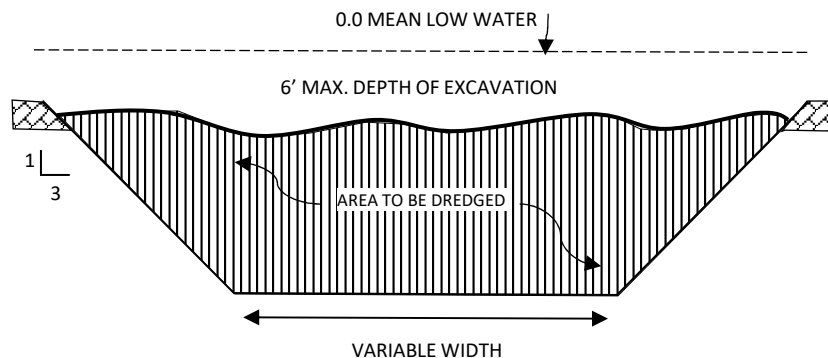

TYPICAL CHANNEL SECTION (OUTER CHANNEL)

N.T.S.

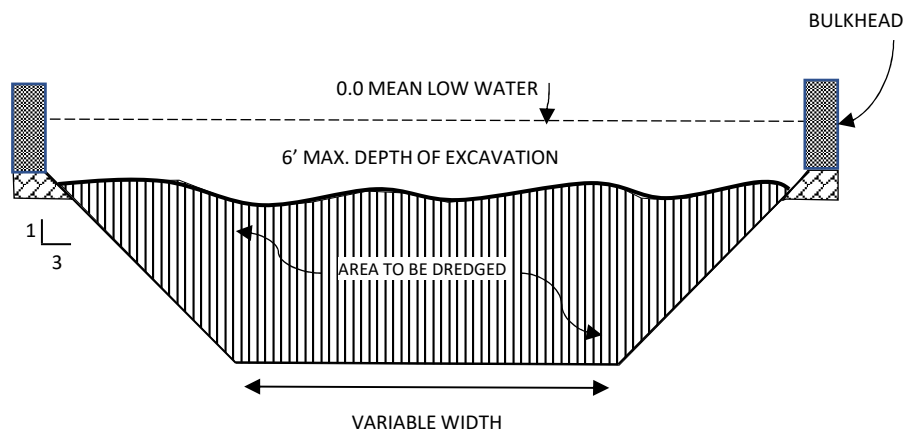

TYPICAL CHANNEL SECTION WITH BULKHEAD (UPPER CHANNEL)

N.T.S.



GEI CONSULTANTS, INC., P. C.  
HUNTINGTON STATION, NEW YORK

APPLICATION BY COUNTY OF SUFFOLK  
JOSEPH T. BROWN, P.E.  
COMMISSIONER  
DEPARTMENT OF PUBLIC WORKS


MAINTENANCE DREDGING AT:

MENANTIC CREEK  
TOWN OF SHELTER ISLAND  
SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022


SHEET 7 OF 8



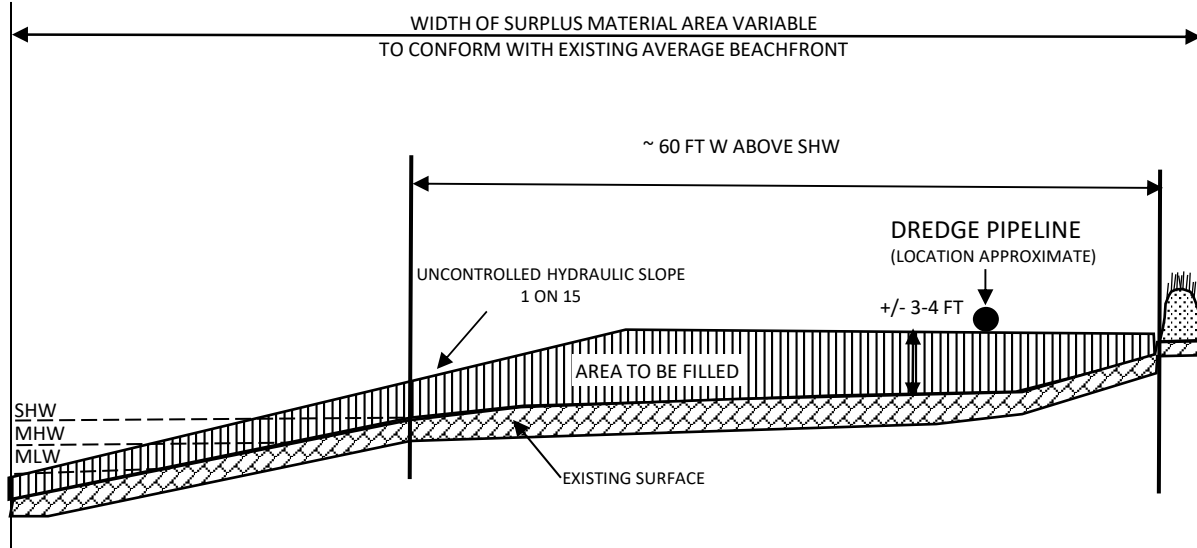

TYPICAL BEACH NOURISHMENT SECTION WADES BEACH

N.T.S.

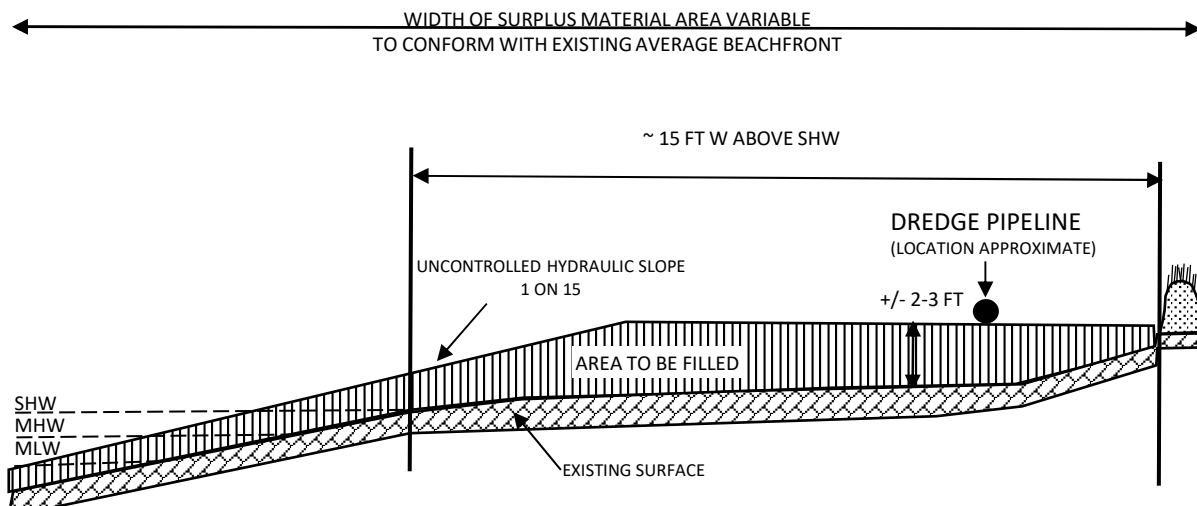

TYPICAL BEACH NOURISHMENT SECTION SHELL BEACH

N.T.S.



GEI CONSULTANTS, INC., P. C.  
HUNTINGTON STATION, NEW YORK

APPLICATION BY COUNTY OF SUFFOLK  
JOSEPH T. BROWN, P.E.  
COMMISSIONER  
DEPARTMENT OF PUBLIC WORKS

MAINTENANCE DREDGING AT:

MENANTIC CREEK  
TOWN OF SHELTER ISLAND  
SUFFOLK COUNTY, NEW YORK

DATE: MARCH 2022

SHEET 8 OF 8